


Flexible Thermistor Probe PB-5006-0M5/1M5/3M/5M

Issue 13: 16th June 2017 (E&OE)




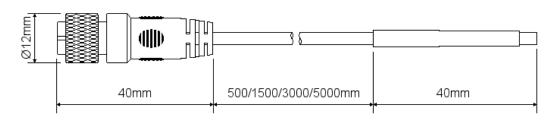

Sensor Specification

Measuring Range Sensor Type -40 $^{\circ}$ C to 125 $^{\circ}$ C (-40 $^{\circ}$ F to 257 $^{\circ}$ F) 10K NTC Thermistor

Sensor Accuracy



Physical Specification

IP Rating IP68 (waterproof)
Weight 40g (1.5m cable version)

Response Time

Water 12 Seconds (to 90% FSD)

Sensor

Material Epoxy

Temperature rating -40 °C to 125 °C (-40 °F to 257 °F)

Cable

Material Silicone rubber

 $\begin{tabular}{ll} \textbf{Temperature rating} & -60\,^\circ\!\text{C to } +200\,^\circ\!\text{C } (-76\,^\circ\!\text{F to } +392\,^\circ\!\text{F}) \\ \end{tabular}$

Connector

Material L-104 (TPU)

Temperature rating -40 °C to 85 °C (-40 °F to 185 °F)

Notes

This probe can be supplied with a 0.5, 1.5, 3 or 5m cable.

For specialist use, for example applications bringing the product into direct contact with food, we can supply material data sheets so you can assess the suitability of this product for your application.

Calibration

A certificate of calibration, traceable to a national standard, can be supplied for an additional charge either at the point of purchase, or if the probe is returned for a service calibration.

Approvals

Gemini Data Loggers (UK) Ltd. operates a Business Management System which conforms to ISO 9001 and ISO 14001.

(6

Related Products

This probe is suitable for use with the following products:

Tinytag Ultra 2 model numbers:

TGU-4020, TGU-4510

Tinytag Plus 2 model numbers:

TGP-4020, TGP-4510, TGP-4520

Tinytag View 2 model numbers:

TV-4020, TV-4510

Tinytag Plus Radio model numbers:

TGRF-4021, TGRF-4022, TGRF-4024

Tinytag Plus LAN model numbers:

TE-4021, TE-4022, TE-4024